

Trusted performance.
Exceptional color.



PPG DURANAR® solid color,
mica and metallic coil coatings



U.S. and Canada Only

We protect and beautify the world®



Proven performance for nearly 60 years

Recognized as one of the world's most specified architectural metal coatings, *Duranar* liquid coatings are formulated with 70% PVDF (polyvinylidene fluoride) combined with PPG's proprietary resin and pigment technologies. The high-performance formulations are available in a two-coat system with a corrosion-inhibitive primer and a durable fluoropolymer color coat or a three-coat system with a clearcoat layer for enhanced protection.

Duranar coatings demonstrate exceptional resistance to color fading, acid rain, ultraviolet rays, chipping and peeling when applied by an approved applicator. They meet or exceed FGIA/AAMA 2605 performance specifications for aluminum and are approved for use on properly cleaned and treated aluminum and coated steel products, including G90 hot-dipped galvanized, GALFAN®, GALVALUME® and ZINCALUME® substrates.

Additionally, *Duranar* coatings have passed third-party graffiti resistance¹ testing in accordance with Method A of ASTM D6578/D6578M-13 (2024) standards.

Duranar coatings are available in a diverse palette of rich solid colors, shimmering micas and dynamic metallics, with options for custom colors.

The PPG Benefit

- Long-term durability
- Excellent resistance to chalk and color fade
- Outstanding corrosion and chemical resistance
- Exceptional graffiti resistance¹
- Excellent flexibility helps with rigorous post-forming operations
- Minimal maintenance: can be cleaned with mild detergents and solvents
- Minor scratches can be repaired in the field

Suggested industries

Building products

Suggested end uses

Building panels


High-end storefronts

Curtain walls

Roof panels

Specifications

FGIA/AAMA 2605

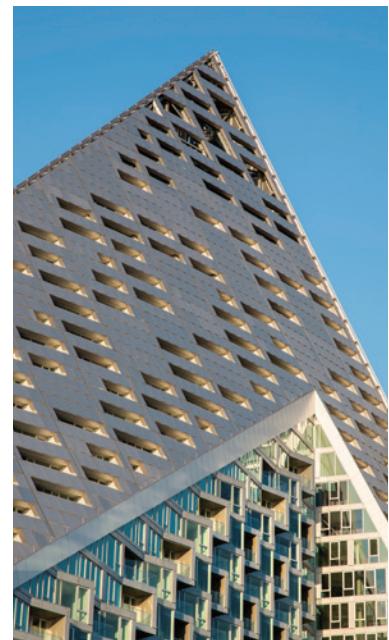


Duranar coil coating products




Duranar Solid Color Coil Coating System

When it comes to architectural design, color matters. So does performance. That is why generations of architects and building owners have counted on *Duranar* coil coatings to protect and beautify their metal building surfaces in various climates around the world. PPG offers an extensive color palette in a wide range of formulations, each designed to provide the desired balance of cost, aesthetics and performance.

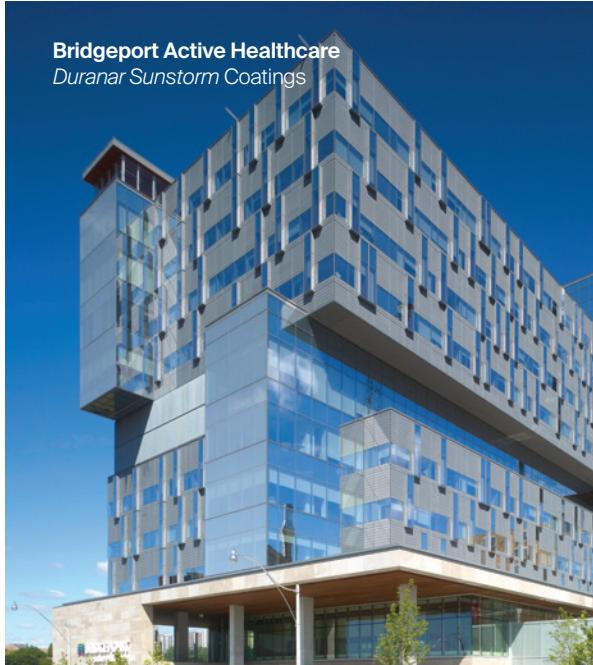

Duranar SUNSTORM® Mica-Effect Coil Coating System

Duranar Sunstorm coating systems feature the same two-coat application as conventional *Duranar* solid color coating systems, adding pearlescent mica flake to the color layer to create a dazzling metalescent look – without the need for aluminum flake or a third-layer clear coat. *Duranar Sunstorm* coatings can also be formulated with PPG's proprietary ULTRA-COOL® infrared (IR)-reflective coating technology to help make buildings cooler, more comfortable and more energy-efficient.

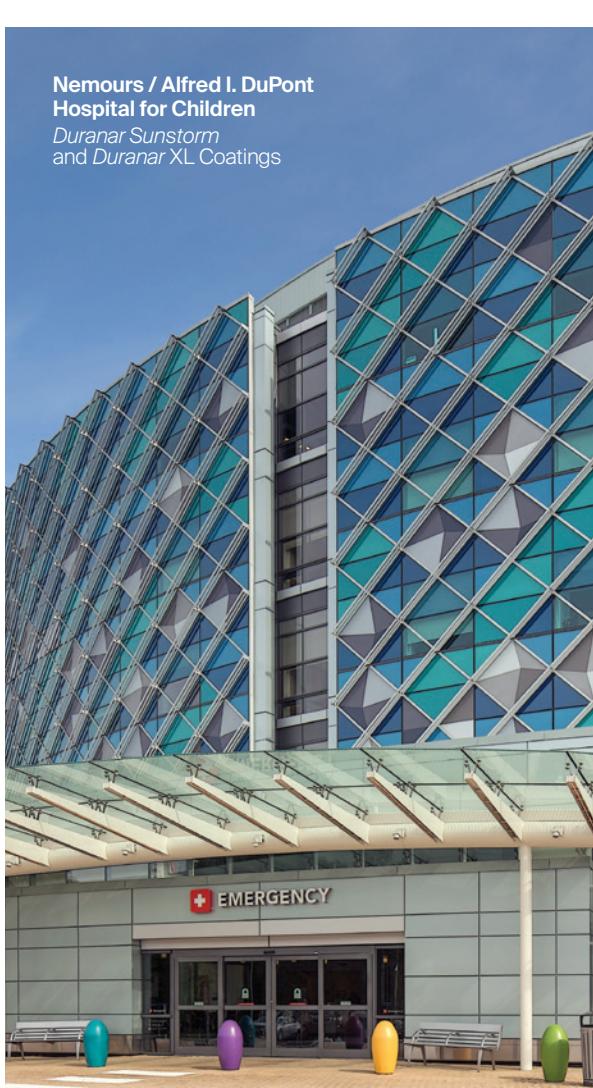

Duranar XL Metallic Coil Coating System

Duranar XL metallic coating systems offer added protection on metal roofs, wall panels and architectural components in difficult seacoast and industrial environments. The three- and four-coat systems consist of a primer, a barrier coat, a color coat (with or without mica flake) and a clear topcoat. The clear topcoat protects the color coat from atmospheric pollutants and enhances its durability. The barrier coat provides excellent UV protection for the primer when semi-transparent colors are applied. The overall film thickness creates a system with outstanding barrier protection, corrosion resistance, chemical resistance and toughness.

Duranar coil coating products

Characteristics and performance apply to Duranar Solid, Duranar Sunstorm and Duranar XL coating systems.



Product Characteristics	Test Standard	Aluminum	Coated Steel ²
Dry Film Thickness	ASTM D1400	0.20-0.30 mil primer 0.70-0.80 mil color/metallic 0.30-0.40 mil clear topcoat	0.20 mil primer 0.75 mil barrier 0.75 mil color/metallic 0.50 mil clear topcoat
Gloss	ASTM D523 Standard @ 60° Low gloss @ 85°	25 - 35 < 10	25 - 35 < 10
Performance Properties	Test Standard	Aluminum	Coated Steel ²
Pencil Hardness	ASTM D3363	F - 2H	F - 2H
Flexibility (T-Bend)³	ASTM 4145	0 - 2 T-bend; no pick-off	0 - 2 T-bend; no pick-off
Adhesion	ASTM D3359	No adhesion loss	No adhesion loss
Reverse Impact	ASTM D2794 1.5 x metal thickness (aluminum) 3.0 x metal thickness (coated steel)	No cracking or adhesion loss No cracking or adhesion loss	No cracking or adhesion loss No cracking or adhesion loss
Acid Resistance	ASTM D1308 10% muriatic acid - 24 hours 20% sulfuric acid - 18 hours	No effect No effect	No effect No effect
Acid Rain Test	Kesternich SO ₂ , DIN 50018	15 cycles minimum No objectionable change	15 cycles minimum No objectionable change
Alkali Resistance	ASTM D1308 10%, 25% NaOH, 1 hour	No effect	No effect
Salt Spray Resistance	ASTM B117 5% salt fog @ 95° F (35° C)	None or few #8 blisters; > 1/16" scribe creep average Passes 4,000 hours	None or few #8 blisters; > 1/16" scribe creep average Passes 1,000 hours
Humidity Resistance	ASTM D714, ASTM D2247, 100% relative humidity @ 95° F (35° C)	Passes 4,000 hours No #8 blisters	Passes 1,500 hours No #8 blisters
Exterior Exposure	ASTM D2244, ASTM D4214 10 Years @ 45°, South Florida	Maximum 5 fade Maximum 8 chalk	Maximum 5 fade Maximum 8 chalk
Graffiti Resistance¹	ASTM D6578, ASTM D6578M-13	Meets or exceeds	Meets or exceeds

1 Graffiti resistance can be enhanced with additional Duranar or PPG CORAFLON® clearcoat layer. Refer to PPG's coil and extrusion maintenance guide for cleaning recommendations. Visit ppgmetalcoatings.com for more information.

2 Coated steel includes G90 hot-dip galvanized, Galfan, Galvalume and Zincalume substrates.

3 Fracturing or rupturing of substrate will rupture coatings. Heavy-gauge and clad steel substrates impose limitations on formability. Duranar coatings are generally flexible beyond the point of substrate rupture.

Shown:

432 Park Avenue
New York, NY
Photos by Tom Kessler

Bridgeport Active Healthcare
Toronto, ON
Photo by Tom Arban

Nemours / Alfred I. DuPont
Hospital for Children
Wilmington, DE
Photos by Tom Kessler

Via 57 West
New York, NY
Photos by Tom Kessler

For project support,
color samples or technical
assistance, please contact us at
ppgmetalcoatings@ppg.com
or 1.800.258.6398.

WARNING: Certain products listed may contain chemicals known to the State of California to cause cancer and/or reproductive harm. For more information go to P65Warnings.ca.gov.

This document contains general information only and should not be construed as creating any warranties, express or implied. Please contact a PPG representative for additional information.

The PPG Logo, *We protect and beautify the world*, Coraflon, Duranar, Sunstorm and ULTRA-Cool are registered trademarks of PPG Industries Ohio, Inc. Galfan is a registered trademark of Galfan Technology Centre Inc. Galvalume is a registered trademark of BIEC International, Inc. Zincalume is a registered trademark of BlueScope Steel Limited. The IN Logo is a registered trademark of LinkedIn Corporation. The YouTube icon is a registered trademark of Google, LLC. ©2025 PPG Industries, Inc. All rights reserved. 10/25 PPG-171

