



FAQ: Non-Skid Coatings

Does PPG offer any powder coatings with non-skid properties suitable for floor coatings?

Yes. PPG offers Envirocron® HTE non-skid powder coatings, which are specifically formulated to provide textured, slip-resistant protection while delivering strong mechanical and chemical durability. These coatings are available in a wide range of colors and gloss levels and can be customized in durable and ultra-durable formulations. The product has been independently tested in accordance with ANSI A326.3 and achieved a dynamic coefficient of friction greater than 0.55 for interior dry and wet surfaces and exterior wet and greasy surfaces. The coating also exceeds ASTM F1694-14 and ASTM F2048-00 requirements.



Currently, **PPG offers** powder coatings with non-skid properties intended for floor coatings.

What are the benefits of Envirocron® HTE non-skid powder coatings?

- Provides textured, slip-resistant protection.
- Passes ANSI A326.3 testing with a dynamic coefficient of friction greater than 0.55.
- Exceeds ASTM F1694-14 and ASTM F2048-00 standards.
- Delivers excellent mechanical durability and chemical resistance.
- Achieves first-pass transfer efficiency rates of 85% or higher, helping improve application efficiency and reduce waste.
- Standard particle size designed for improved application performance
- Available in a wide range of colors and gloss levels.

What applications are recommended for Envirocron® HTE non-skid powder coatings?

Recommended uses include:

- Industrial walkways and platforms
- Access ladders and gangways
- Stairs, ramps and sidewalk transitions
- Vehicle step surfaces
- Docks, decks and piers



Applicable industries include:

- General industrial
- Vehicle and equipment
- Building and construction



Table #-ANSI A326.3 Test Results PCST73108 Samples


Categories (ANSI A326.3)	Passed / Failed criteria
Interior Wet	Passed
Interior Wet Plus	Passed
Exterior Wet	Passed
Oils and Greases	Passed

Please see the graph and table below for detailed results.

Graph #1 - ANSI A326.3 DCOF Test Results

Please inquire about detailed results that demonstrate the PPG products that exceed the minimum passing threshold.

ANSI A326.3 Wet DCOF Testing PCST73108

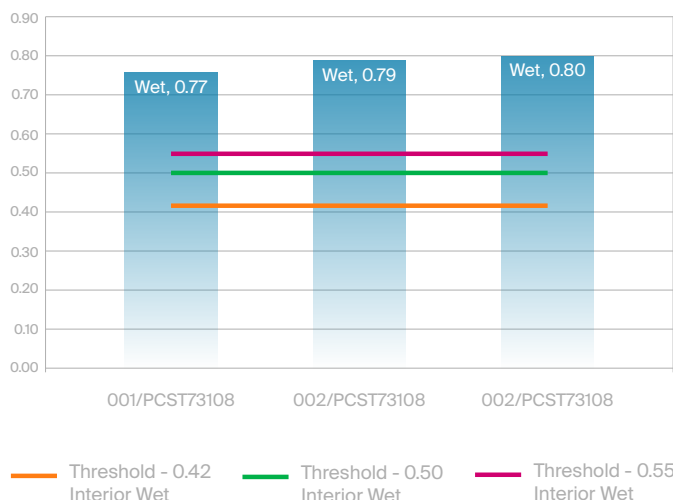

Statements and methods described herein are based upon the best information and practices known to PPG Industries, Inc. ("PPG"). Any statements or methods mentioned herein are general suggestions only and are not to be construed as representations or warranties as to safety, performance, or results. Since the suitability and performance of the product are highly dependent on the product user's processes, operations, and numerous other user-determined conditions, the user is solely responsible for and assumes all responsibility, risk and liability arising from, the determination of whether the product is suitable for the user's purposes, including without limitation substrate, applications process, pasteurization and/or processing, and end-use. No testing, suggestions or data offered by PPG to the user shall relieve the user of this responsibility. PPG does not warrant freedom from patent infringement in the use of any formula or process set forth herein. Continuous improvements in coatings technology may cause future technical data to vary from what is in this bulletin. Contact your PPG representative for the most up-to-date information. IC364 08/25