

## 10RS SCISSOR LIFTS

### Platform

- 0.98 m roll-out deck extension
- Fold down handrails
- Half swing gate
- Removable platform control box
- Lanyard attach points
- Full proportional drive joystick control with integral thumb steer switch
- Proportional lift/lower speed control
- Joystick enable for lift and drive
- Load sensing system

### Power & Transmission

- 4 x 6V 220 A/hr deep cycle batteries
- Automatic positive traction
- Programmable "Personality" settings
- On-board self-diagnostic testing
- Lift off steel hoods on battery/electrical compartments
- 20 amp automatic battery charger
- Dual motor direct electric rear wheel drive
- Dual wheel automatic brakes (on rear wheels)
- Emergency brake release

### Functional Equipment & Accessories

- Passive pothole protection system
- AC cable to platform
- Battery charge level indicator
- Hourmeter
- Lubrication free scissor arm bushings
- Scissor maintenance prop
- Manual descent
- Horn
- Non-marking solid tyres (406 x 127)
- Lifting and tie down points
- Slope alarm and light
- Fork lift pockets

### Available Options

- 220A/hr maintenance free AGM batteries in lieu of standard
- All motion alarm
- Amber strobe light
- Pipe racks



Certain options or country standards may increase weight and/or dimensions.

# 10RS SCISSOR LIFTS

|   |                         |
|---|-------------------------|
| A. Platform Height - Elevated           | 9.75m                   |
| B. Platform Height - Lowered            | 1.38m                   |
| C. Platform Railing Height              | 1.10m                   |
| D. Stowed Height (Rails Folded)         | 1.97m                   |
| E. Platform Size Inside (W x L)         | 1.07m x 2.16m           |
| F. Deck Extension                       | 0.86m                   |
| G. Overall Width                        | 1.22m                   |
| H. Overall Length                       | 2.41m                   |
| I. Wheelbase                            | 1.85m                   |
| J. Ground Clearance (centre of machine) | 10cm                    |
| Platform Capacity <sup>1</sup>          | 320kg                   |
| Capacity on Deck Extension              | 120kg                   |
| Lift/Lower Time                         | 60 / 60 sec.            |
| Maximum Drive Height                    | 9.75m                   |
| Machine weight <sup>2</sup>             | 2,750 kg                |
| Maximum Ground Bearing Pressure         | 7.60 kg/cm <sup>2</sup> |
| Drive Speed - Lowered                   | 4.0 km/h                |
| Drive Speed - Elevated                  | 0.5 km/h                |
| Gradeability                            | 25%                     |
| Turning Radius - Inside                 | 1.22m                   |
| Turning Radius - Outside                | 3.18m                   |
| Tyres (Non-Marking Solid)               | 406 x 127               |
| Brakes                                  | Automatic Friction Rear |
| Drive (Nominal)                         | 24V Electric 2.5kW      |
| Batteries                               | 4x 6V 220A/hr           |
| Charger (120/240V -50/60Hz)             | 20 Amp Automatic        |
| Pump Motor                              | 3kW                     |
| Hydraulic System                        | 15L                     |


**JLG Industries, Inc. is a leading designer and manufacturer of access equipment and complementary services and attachments.**

JLG has manufacturing facilities in the United States, France, Romania, China and Belgium. Customers throughout Europe, Scandinavia, Africa and the Middle East benefit from a network of dedicated sales and service operations designed to deliver the highest levels of support.

**JLG is an Oshkosh Corporation company.**

**[www.jlgeurope.com](http://www.jlgeurope.com)**

<sup>1</sup> Capacities shown are maximum with 2 persons indoor on all models. Outdoor ratings are: 10RS – 1 person / 320 kg.  
<sup>2</sup> Certain options or country standards may increase weight and/or dimensions.

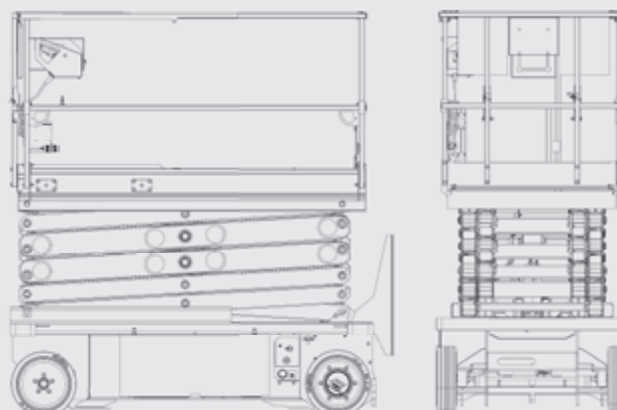

JLG is continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight. Specifications may change to meet country standards or with the addition of optional equipment.