#### PREDICTED ENERGY ASSESSMENT




Plot 072, 2 Bed, K, B, WC Dwelling type: Date of assessment: Produced by: Total floor area:

House, Semi-Detached 30/07/2019 Andrew McManus 73.78 m<sup>2</sup>


This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.

The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide  $(CO_2)$  emissions.

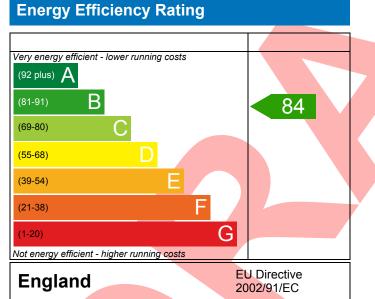

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

#### Environmental Impact (CO<sub>2</sub>) Rating

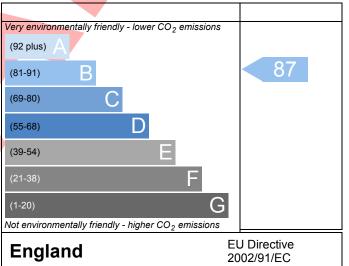

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide  $(CO_2)$  emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



# **BUILDING REGULATION COMPLIANCE** Calculation Type: New Build (As Designed)



Property	Plot 072, 2 Bed, K, B	, WC								
AP Rating			84 B	DER		17.30	TER	R	18.28	
nvironmental			87 B	% DER <ter< td=""><td></td><td></td><td></td><td>5.34</td><td></td></ter<>				5.34		
CO₂ Emissions (t/year)			1.05	DFEE		44.18	TFE	E	49.62	
eneral Requirements Compliance			Pass	% DFEE <tfe< td=""><td>E</td><td></td><td></td><td>10.96</td><td></td></tfe<>	E			10.96		
	Ir. Andrew McManus, ndrew.mcmanus@aes		/IcManus,	Tel: 01455 88	3250,		Ass	essor ID	P638-000	
Client	ovis South West									
JMARY FOR INPUT D	ATA FOR New Build (A	As Designo	ed)							
riterion 1 – Achieving	the TER and TFEE rate	e								
a TER and DER										
Fuel for main heatir	ng		Mains ga	as						
Fuel factor			1.00 (ma	ains gas)						
Target Carbon Diox	ide Emission Rate (TER	R)	18.28					kgCO₂/m²		
Dwelling Carbon Die	oxide Emission Rate (D	ER)	17.30					kgCO₂/m²	Pass	
			-0.98 (-5	.4%)				kgCO₂/m²		
b TFEE and DFEE										
Target Fabric Energy Efficiency (TFEE)			49.62					kWh/m²/yr		
Dwelling Fabric Ene	ergy Efficiency (DFEE)		44.18					kWh/m²/yr		
			-5.4 (-10	.9%)				kWh/m²/yr	Pass	
riterion 2 – Limits on	design flexibility									
Limiting Fabric Star	ndards									
2 Fabric U-values										
Element		Average			High	est				
External wal	I	0.25 (ma	x. 0.30)		0.25	(max. 0.70	))		Pass	
Party wall		0.00 (ma			-				Pass	
Floor		0.18 (ma	,			(max. 0.70			Pass	
Roof		x. 0.20) 0.12 (max. 0.35)					Pass			
Openings		1.33 (ma	x. 2.00)		1.40	(max. 3.30	))		Pass	
2a Thermal bridging										
Thermal bridgin	g calculated from linea	ar therma	l transmit	tances for each	h juncti	on				
<u>3 Air permeability</u>										
Air permeability at 50 pascals			5.00 (design value)				m³/(h.	m³/(h.m²) @ 50 Pa		
Maximum			10.0				m³/(h.	m²) @ 50 Pa	Pass	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



## **BUILDING REGULATION COMPLIANCE** Calculation Type: New Build (As Designed)




<i>,</i>		
Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database Potterton Assure 30 Combi Combi boiler Efficiency: 89.0% SEDBUK2009 Minimum: 88.0%	Pass
Secondary heating system	None	
5 Cylinder insulation		
Hot water storage	No cylinder	
6 Controls		
Space heating controls	Programmer, room thermostat and TRVs	Pass
Hot water controls	No cylinder	
Boiler interlock	Yes	Pass
7 Low energy lights		
Percentage of fixed lights with low-energy fittings	100 %	
Minimum	75 %	Pass
8 Mechanical ventilation		
Continuous extract system (decentralised)		
Specific fan power	0.1700 0.1800	
Maximum	0.7	Pass
Criterion 3 – Limiting the effects of heat gains in su	ummer	
<u>9 Summertime temperature</u>		
Overheating risk (Southern England)	Slight	Pass
Based on:		
Overshading	Average	
Windows facing North	4.62 m <sup>2</sup> , No overhang	
Windows facing South Windows facing West	6.90 m <sup>2</sup> , No overhang 1.54 m <sup>2</sup> , No overhang	
Air change rate	4.00 ach	
Blinds/curtains	None	
Criterion 4 – Building performance consistent with		
Party Walls		
Type	U-value	
Filled Cavity with Edge Sealing	0.00 W/m²K	Pass
Air permeability and pressure testing		
<u>3 Air permeability</u>		
Air permeability at 50 pascals	5.00 (design value) m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa	
Maximum	10.0 m³/(h.m²) @ 50 Pa	Pass
10 Key features		
Party wall U-value	0.00 W/m²K	
Roof U-value	0.12 W/m²K	
Door U-value	0.90 W/m²K	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



### RECOMMENDATIONS



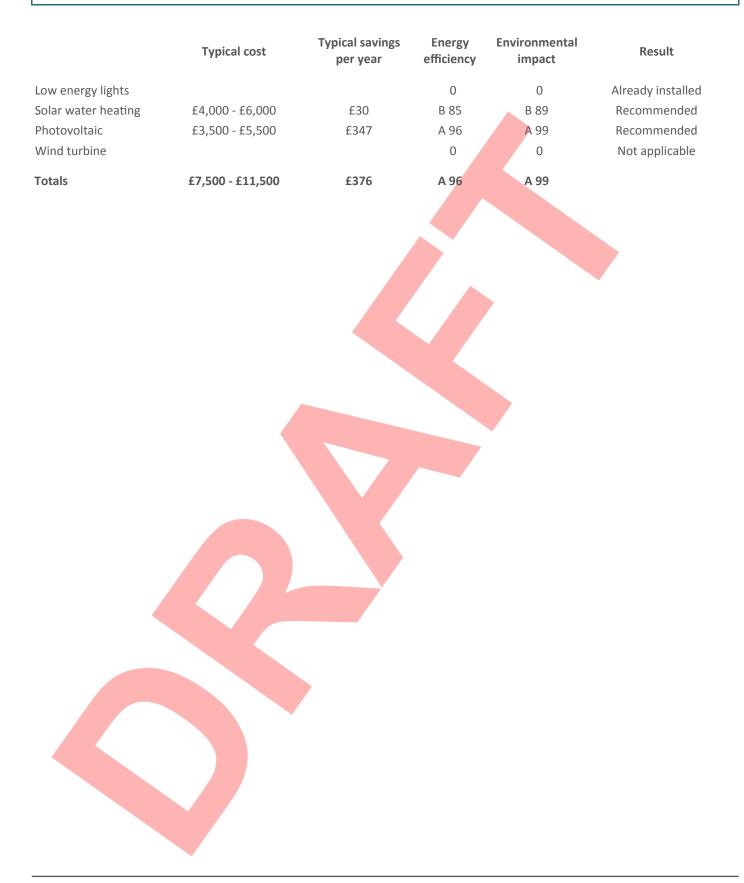

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

