### PREDICTED ENERGY ASSESSMENT




Eastergate, Hampshire Homes Dwelling type: Date of assessment: Produced by: Total floor area:

House, End-Terrace 24/06/2021 William Vincent 8**5**.46 m<sup>2</sup>


This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.

The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide  $(CO_2)$  emissions.

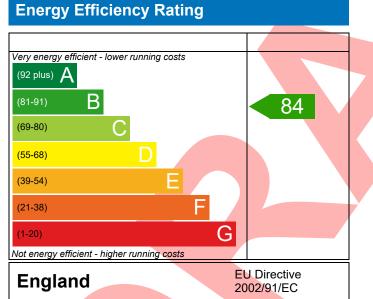

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

#### Environmental Impact (CO<sub>2</sub>) Rating

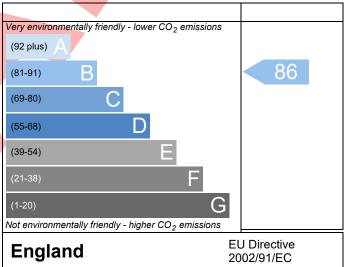

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide  $(CO_2)$  emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



# BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference		Plot 008 3BB End-T Issued on Date 24/06/2021							24/06/2021	
Assessment		001 Prop Type Ref								
Reference										
Property Eastergate, Hampshire Homes										
SAP Rating				84 B	DER	17	7.40	TER	18.40	
Environmental				86 B	% DER <ter< th=""><th></th><th></th><th>5.44</th><th></th></ter<>			5.44		
CO <sub>2</sub> Emissions (t/year)				1.25	DFEE		.54	TFEE	53.48	
General Requirements Compliance				Pass	% DFEE <tfee< td=""><td></td><td></td><td>11.11</td><td></td></tfee<>			11.11		
Assessor Details		. William Vincent, W lliam.Vincent@ee-ltc		Vincent, Tel: 01582544250, Assessor ID T759-0001						
Client										
SUMARY FOR INPUT	DA	TA FOR New Build (#	As Designe	ed)						
Criterion 1 – Achievi	ng t	he TER and TFEE rat	9							
1a TER and DER										
Fuel for main hea	5		Mains gas							
Fuel factor				1.00 (mains gas)						
Target Carbon Dioxide Emission Rate (TER)				18.40				kgCO <sub>2</sub> /m <sup>2</sup>		
Dwelling Carbon Dioxide Emission Rate (DER)				17.40			kgCO₂/m²	Pass		
-1.00 (-5.4%) kgCO <sub>2</sub>							kgCO₂/m²			
<u>1b TFEE and DFEE</u>										
Target Fabric Energy Efficiency (TFEE)				53.48 kWh/m²/yr						
Dwelling Fabric Energy Efficiency (DFEE)				47.54			kWh/m²/yr			
				-6.0 (-11	.2%)			kWh/m²/yr	Pass	
Criterion 2 – Limits o					-					
Limiting Fabric St		lards								
2 Fabric U-values	5									
Element			Average			Highest				
External w	all		0.22 (max			0.22 (max	«. 0.70	))	Pass	
Party wall			0.00 (max			-			Pass	
							(. 0.70 ( 0.25	Pass		
				ax. 0.20) 0.11 (max.						
Openings 1.47 (max. 2.00) 1.50 (max. 3.30)						r'ass				
2a Thermal bridging Thermal bridging calculated from linear thermal transmittances for each junction										
3 Air permeabilit	-	calculated nonninea		transmitt		junction				
						m³/(h.m²) @ 50 Pa				
Maximum				10.0				m <sup>3</sup> /(h.m <sup>2</sup> ) @ 50 Pa Pass		
Limiting System Efficiencies				10.0					1 435	
4 Heating efficier										
Heating enicle	icy									

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



## **BUILDING REGULATION COMPLIANCE** Calculation Type: New Build (As Designed)



Main heating system Boiler system with radiators or underfloor - Ma Data from database	
Ideal LOGIC COMBI ESP1 35 Combi boiler Efficiency: 89.6% SEDBUK2009	ains gas Pass
Minimum: 88.0%	
Secondary heating system None	
5 Cylinder insulation	
Hot water storage No cylinder	
<u>6 Controls</u>	
Space heating controls Time and temperature zone control	Pass
Hot water controls No cylinder	
Boiler interlock Yes	Pass
7 Low energy lights	
Percentage of fixed lights with low-energy 100	%
Minimum 75	% Pass
8 Mechanical ventilation	
Not applicable	
Criterion 3 – Limiting the effects of heat gains in summer	
9 Summertime temperature	
Overheating risk (Thames Valley)	Pass
Based on:	1
Overshading Average	
Windows facing North East 1.70 m <sup>2</sup> , No overhang	
Windows facing South East 4.32 m <sup>2</sup> , No overhang	
Windows facing North West     8.15 m², No overhang	
Air change rate 4.00 ach	
Blinds/curtains Dark-coloured curtain or roller blind, closed 10	0% of daylight
Criterion 4 – Building performance consistent with DER and DFEE rate	
Party Walls	
	W/m²K Pass
Type     U-value       Filled Cavity with Edge Sealing     0.00	
Filled Cavity with Edge Sealing 0.00	
Filled Cavity with Edge Sealing     0.00       Air permeability and pressure testing	
Filled Cavity with Edge Sealing O.00 Air permeability and pressure testing 3 Air permeability	
Filled Cavity with Edge Sealing       0.00         Air permeability and pressure testing         3 Air permeability         Air permeability at 50 pascals         5.00 (design value)         m³/(h.	.m²) @ 50 Pa
Filled Cavity with Edge Sealing       0.00         Air permeability and pressure testing         3 Air permeability         Air permeability         Air permeability at 50 pascals         Maximum         10.0	
Filled Cavity with Edge Sealing     0.00       Air permeability and pressure testing       3 Air permeability       Air permeability at 50 pascals       Maximum       10 Key features	.m²) @ 50 Pa .m²) @ 50 Pa Pass
Filled Cavity with Edge Sealing       0.00         Air permeability and pressure testing         3 Air permeability         Air permeability at 50 pascals         Maximum         10.0         m³/(h.         Party wall U-value	.m²) @ 50 Pa

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



## RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£30	B 85	B 88	Recommended
Photovoltaic	£3,500 - £5,500	£341	A 95	A 97	Recommended
Wind turbine			0	0	Not applicable
Totals	£7,500 - £11,500	£371	A 95	A 97	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

