PREDICTED ENERGY ASSESSMENT



Plot 214, 3 Bed, K. WC. B. ES Dwelling type: House, End-Terrace

Date of assessment: 15/03/2022


Produced by: Andrew McManus

Total floor area: 80.36 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

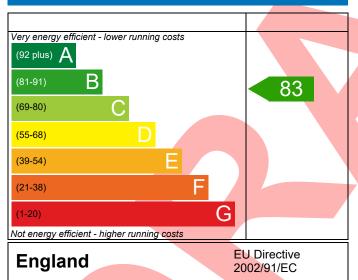

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

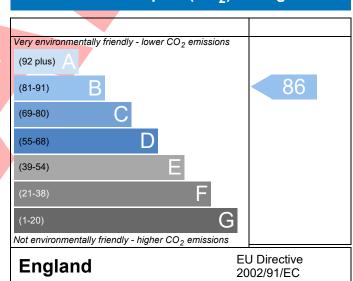

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference 4907-0023-4605-	214			Issued on Date	15/03/2022		
Assessment 214	Prop Type Ref Eveleigh - End (As)						
Reference							
Property Plot 214, 3 Bed, K	, WC, B, ES						
SAP Rating	83 B	DER	18.20	TER	18.23		
Environmental	86 B	% DER <ter< td=""><td></td><td>0.15</td><td>_</td></ter<>		0.15	_		
CO₂ Emissions (t/year)	1.27	DFEE	46.73	TFEE	50.79		
General Requirements Compliance	Pass	% DFEE <tfee< td=""><td></td><td>8.00</td><td></td></tfee<>		8.00			
	io Junges, Tel: 01884	242050,		Assessor ID	P638-0001		
silvio.junges@aessou	thern.co.uk						
Client							
SUMARY FOR INPUT DATA FOR New Build	(As Designed)						
Criterion 1 – Achieving the TER and TFEE r	ate						
1a TER and DER							
Fuel for main heating	Mains ga	ns					
Fuel factor	1.00 (ma	ins gas)					
Target Carbon Dioxide Emission Rate (T	ER) 18.23	18.23 kgCO ₂ /m ²					
Dwelling Carbon Dioxide Emission Rate	(DER) 18.20			kgCO ₂ /m ²	Pass		
41 7555 1 0555	-0.03 (-0	.2%)		kgCO ₂ /m ²			
1b TFEE and DFEE	F0.70			LAAth to 2 to o			
Target Fabric Energy Efficiency (TFEE)		50.79 kWh/m²/yr					
Dwelling Fabric Energy Efficiency (DFEE) 46.73 -4.1 (-8.1	10/1		kWh/m²/yr kWh/m²/yr	Pass		
Criterion 2 – Limits on design flexibility	-4.1 (-8	170)		KVVII/III / yI	F 033		
Limiting Fabric Standards							
2 Fabric U-values							
Element	Avorago	u:	ighest				
External wall	Average 0.25 (max. 0.30)		25 (max. 0.70)		Pass		
Party wall	0.00 (max. 0.20)	- -	25 (IIIax. 0.70)		Pass		
Floor	0.18 (max. 0.25)	0	18 (max. 0.70))	Pass		
Roof	0.18 (max. 0.20)		18 (max. 0.35)		Pass		
Openings	1.33 (max. 2.00)						
2a Thermal bridging			. ,		Pass		
Thermal bridging calculated from lir	near thermal transmit	ances for each jur	nction				
3 Air permeability		,					
Air permeability at 50 pascals	5.01 (de	sign value)		m³/(h.m²) @ 50 Pa	1		
Maximum	10.0	<u> </u>		m ³ /(h.m ²) @ 50 Pa			
Limiting System Efficiencies				7, 7,0 2313			

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database Ideal LOGIC COMBI ESP1 35 Combi boiler Efficiency: 89.6% SEDBUK2009			
	Minimum: 88.0%			
Secondary heating system				
5 Cylinder insulation				
Hot water storage	No cylinder			
<u>6 Controls</u>				
Space heating controls	Programmer, room thermostat and TRVs	Pass		
Hot water controls	No cylinder			
Boiler interlock	Yes	Pass		
7 Low energy lights				
Percentage of fixed lights with low-energy fittings	100 %			
Minimum	75 %	Pass		
8 Mechanical ventilation				
Not applicable				
Criterion 3 – Limiting the effects of heat gains in su	mmer			
9 Summertime temperature				
Overheating risk (Severn Valley)	Slight	Pass		
Based on:				
Overshading	Average			
Windows facing North East	4.40 m², No overhang			
Windows facing South East	0.66 m², No overhang			
Windows facing South West	6.95 m², No overhang			
Air change rate Blinds/curtains	4.00 ach None			
Criterion 4 – Building performance consistent with				
Party Walls	DEN AIIU DEEL TALE			
Type	U-value			
Filled Cavity with Edge Sealing	0.00 W/m²K	Pass		
Air permeability and pressure testing	0.00 Wym K	1 433		
3 Air permeability				
Air permeability at 50 pascals	5.01 (design value) m ³ /(h.m ²) @ 50 Pa	ı		
Maximum	10.0 m ³ /(h.m ²) @ 50 Pa			
10 Key features	,,,			
Party wall U-value	0.00 W/m²K			
Door U-value	0.90 W/m²K			

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£25	B 85	B 88	Recommended
Photovoltaic	£3,500 - £5,500	£354	A 95	A 97	Recommended
Wind turbine			0	0	Not applicable
Totals	£7,500 - £11,500	£379	A 95	A 97	



This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

