PREDICTED ENERGY ASSESSMENT




Plot 215, 2 Bed, K, WC, B, TQ13 Dwelling type: House, Mid-Terrace

Date of assessment: 13/05/2022
Produced by: Silvio Junges
Total floor area: 70.56 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

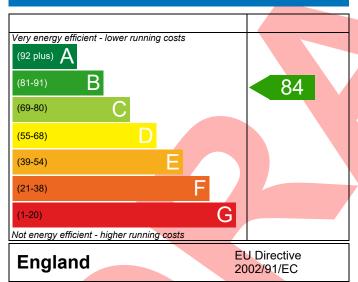

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

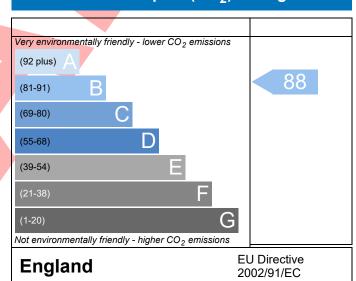

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference 4907-P637-3605-215				Issued on Date	13/05/2022	
Assessment 185		Pro	op Type Ref	A21 Mid (Op) - Stagg	gered	
Reference						
Property Plot 215, 2 Bed, K, WC,	B, TQ13					
SAP Rating	84 B	DER	16.35	TER	17.93	
Environmental	88 B	% DER <ter< td=""><td></td><td>8.80</td><td></td></ter<>		8.80		
CO ₂ Emissions (t/year)	0.94	DFEE	40.16	TFEE	46.06	
General Requirements Compliance	Pass	% DFEE <tfee< td=""><td></td><td>12.82</td><td></td></tfee<>		12.82		
Assessor Details Mr. Silvio Junges, Silvio Jung	ges, Tel: 01884 2	242050,		Assessor ID	P637-0001	
silvio.junges@aessouthern.	co.uk					
Client						
SUMARY FOR INPUT DATA FOR New Build (As D	esigned)					
Criterion 1 – Achieving the TER and TFEE rate						
1a TER and DER						
Fuel for main heating	Mains ga	ns				
Fuel factor	1.00 (ma	ins gas)				
Target Carbon Dioxide Emission Rate (TER)	17.93			kgCO ₂ /m ²		
Dwelling Carbon Dioxide Emission Rate (DER)	16.35			kgCO ₂ /m ²	Pass	
	-1.58 (-8	.8%)		kgCO ₂ /m ²		
1b TFEE and DFEE						
Target Fabric Energy Efficiency (TFEE)	46.06			kWh/m²/yr		
Dwelling Fabric Energy Efficiency (DFEE)	40.16			kWh/m²/yr		
	-5.9 (-12	.8%)		kWh/m²/yr	Pass	
Criterion 2 – Limits on design flexibility						
Limiting Fabric Standards						
2 Fabric U-values						
	erage		ighest			
	4 (max. 0.30)	0.	24 (max. 0.7)	0)	Pass	
	0 (max. 0.20)	-			Pass	
	2 (max. 0.25)		12 (max. 0.7)	•	Pass	
		(max. 0.20) 0.11 (max. 0.35)				
	(max. 2.00) 1.40 (max. 3.30) Pass					
2a Thermal bridging						
Thermal bridging calculated from linear th	ermal transmitt	ances for each jur	nction			
3 Air permeability						
Air permeability at 50 pascals		sign value)		$m^3/(h.m^2) @ 50 P$	a	
Maximum	10.0			m ³ /(h.m ²) @ 50 P	a Pass	
Limiting System Efficiencies						

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database Ideal LOGIC COMBI ESP1 35 Combi boiler				
	Efficiency: 89.6% SEDBUK2009				
	Minimum: 88.0%				
Secondary heating system	None				
5 Cylinder insulation					
Hot water storage	No cylinder				
<u>6 Controls</u>					
Space heating controls	Programmer, room thermostat and TRVs	Pass			
Hot water controls	No cylinder				
Boiler interlock	Yes				
7 Low energy lights					
Percentage of fixed lights with low-energy fittings	100 %				
Minimum	75 %	Pass			
8 Mechanical ventilation					
Continuous extract system (decentralised)					
Specific fan power	0.1900 0.1800]			
Maximum	0.7	Pass			
Criterion 3 – Limiting the effects of heat gains in sum	mer				
Criterion 3 – Limiting the effects of heat gains in sums 9 Summertime temperature	mer				
	Not significant	Pass			
9 Summertime temperature		Pass			
9 Summertime temperature Overheating risk (South West England)		Pass			
9 Summertime temperature Overheating risk (South West England) Based on: Overshading Windows facing East	Not significant Average 3.52 m², No overhang	Pass			
9 Summertime temperature Overheating risk (South West England) Based on: Overshading Windows facing East Windows facing West	Not significant Average 3.52 m², No overhang 6.46 m², No overhang	Pass			
9 Summertime temperature Overheating risk (South West England) Based on: Overshading Windows facing East Windows facing West Air change rate	Average 3.52 m², No overhang 6.46 m², No overhang 4.00 ach	Pass			
9 Summertime temperature Overheating risk (South West England) Based on: Overshading Windows facing East Windows facing West	Not significant Average 3.52 m², No overhang 6.46 m², No overhang	Pass			
9 Summertime temperature Overheating risk (South West England) Based on: Overshading Windows facing East Windows facing West Air change rate	Not significant Average 3.52 m², No overhang 6.46 m², No overhang 4.00 ach None	Pass			
9 Summertime temperature Overheating risk (South West England) Based on: Overshading Windows facing East Windows facing West Air change rate Blinds/curtains	Not significant Average 3.52 m², No overhang 6.46 m², No overhang 4.00 ach None	Pass			
9 Summertime temperature Overheating risk (South West England) Based on: Overshading Windows facing East Windows facing West Air change rate Blinds/curtains Criterion 4 – Building performance consistent with Di	Not significant Average 3.52 m², No overhang 6.46 m², No overhang 4.00 ach None	Pass			
9 Summertime temperature Overheating risk (South West England) Based on: Overshading Windows facing East Windows facing West Air change rate Blinds/curtains Criterion 4 – Building performance consistent with Di	Average 3.52 m², No overhang 6.46 m², No overhang 4.00 ach None ER and DFEE rate	Pass			
9 Summertime temperature Overheating risk (South West England) Based on: Overshading Windows facing East Windows facing West Air change rate Blinds/curtains Criterion 4 – Building performance consistent with Di Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing	Not significant Average 3.52 m², No overhang 6.46 m², No overhang 4.00 ach None ER and DFEE rate U-value				
9 Summertime temperature Overheating risk (South West England) Based on: Overshading Windows facing East Windows facing West Air change rate Blinds/curtains Criterion 4 – Building performance consistent with DI Party Walls Type Filled Cavity with Edge Sealing	Not significant Average 3.52 m², No overhang 6.46 m², No overhang 4.00 ach None ER and DFEE rate U-value				
9 Summertime temperature Overheating risk (South West England) Based on: Overshading Windows facing East Windows facing West Air change rate Blinds/curtains Criterion 4 – Building performance consistent with Di Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing	Not significant Average 3.52 m², No overhang 6.46 m², No overhang 4.00 ach None ER and DFEE rate U-value 0.00 W/m²K 5.00 (design value) m³/(h.m²) @ 50 Pa	Pass			
9 Summertime temperature Overheating risk (South West England) Based on: Overshading Windows facing East Windows facing West Air change rate Blinds/curtains Criterion 4 – Building performance consistent with Di Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability	Not significant Average 3.52 m², No overhang 6.46 m², No overhang 4.00 ach None ER and DFEE rate U-value 0.00 W/m²K				
9 Summertime temperature Overheating risk (South West England) Based on: Overshading Windows facing East Windows facing West Air change rate Blinds/curtains Criterion 4 – Building performance consistent with Di Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals	Not significant Average 3.52 m², No overhang 6.46 m², No overhang 4.00 ach None ER and DFEE rate U-value 0.00 W/m²K 5.00 (design value) m³/(h.m²) @ 50 Pa	Pass			
9 Summertime temperature Overheating risk (South West England) Based on: Overshading Windows facing East Windows facing West Air change rate Blinds/curtains Criterion 4 – Building performance consistent with Di Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals Maximum	Not significant Average 3.52 m², No overhang 6.46 m², No overhang 4.00 ach None ER and DFEE rate U-value 0.00 W/m²K 5.00 (design value) m³/(h.m²) @ 50 Pa	Pass			
9 Summertime temperature Overheating risk (South West England) Based on: Overshading Windows facing East Windows facing West Air change rate Blinds/curtains Criterion 4 – Building performance consistent with Di Party Walls Type Filled Cavity with Edge Sealing Air permeability and pressure testing 3 Air permeability Air permeability at 50 pascals Maximum 10 Key features	Not significant	Pass			

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£25	B 86	B 90	Recommended
Photovoltaic	£3,500 - £5,500	£369	A 97	A 101	Recommended
Wind turbine			0	0	Not applicable
Totals	£7,500 - £11,500	£394	A 97	A 101	



This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

