
PREDICTED ENERGY ASSESSMENT



Plot 157, 2 Bed, 1B, 0ES, Honiton, Devon Dwelling type: Date of assessment: Produced by: Total floor area: Flat, Mid-Terrace 05/03/2021 Mitchell Bennellick 54 m²


This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.

The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO_2) emissions.

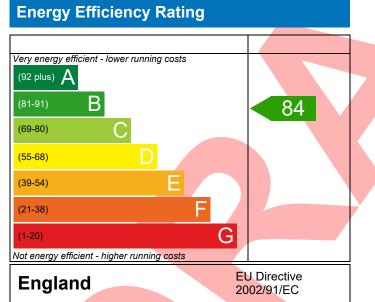

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

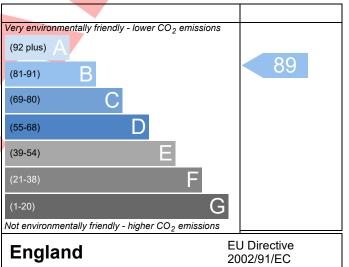

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO_2) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r16

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



	4907-0023-3730-1	.57				Issued on Date	05/03/202
Assessment	157				Prop Type Ref	Block F - 1F Apartment	
Reference						·	
Property	Plot 157, 2 Bed, 1E	3, OES, Honi	ton, Devo	n			
AP Rating			84 B	DER	17.24	TER	18.06
nvironmental			89 B	% DER <ter< td=""><td></td><td>4.53</td><td></td></ter<>		4.53	
CO₂ Emissions (t/year)			0.75	DFEE	36.02	TFEE	37.84
General Requirements	Compliance		Pass	% DFEE <tfee< td=""><td></td><td>4.82</td><td></td></tfee<>		4.82	
	liss Lindsey Dean, Lin ndsey.dean@aessc.c	, ,	Tel: 0188	34 242050,		Assessor ID	P635-0001
Client	aker Estates						
UMARY FOR INPUT DA	ATA FOR New Build	(As Designe	ed)				
riterion 1 – Achieving	the TER and TFEE ra	ite					
a TER and DER							
Fuel for main heating			Mains gas				
Fuel factor			1.00 (ma	ains gas)			Ī
Target Carbon Dioxi	de Emission Rate (TE	ER)	18.06			kgCO ₂ /m ²	
Dwelling Carbon Dioxide Emission Rate (DER)		(DER)	17.24			kgCO ₂ /m ²	Pass
			-0.82 (-4	.5%)		kgCO ₂ /m ²	
b TFEE and DFEE							
Target Fabric Energy	y Efficiency (TFEE)		37.84			kWh/m²/yr	
Dwelling Fabric Ener	rgy Efficiency (DFEE)		36.02	7		kWh/m²/yr	
			-1.8 (-4.8	8%)		kWh/m²/yr	Pass
Criterion 2 – Limits on o	design flexibility						
Limiting Fabric Stan	dards						
2 Fabric U-values							
Element		Average			Highest		
External wall		0.22 (max	(. 0.30)		0.23 (max. 0.1	70)	Pass
External wan			(0.20)				
Party wall		0.00 (max			-		Pass
		0.00 (max 1.22 (max			- 1.40 (max. 3.3	30)	Pass Pass
Party wall					- 1.40 (max. 3.3	30)	
Party wall Openings 2a Thermal bridging	g g calculated from line	1.22 (max	<. 2.00)		·	30)	
Party wall Openings <u>2a Thermal bridging</u> Thermal bridging	-	1.22 (max	<. 2.00)		·	30)	
Party wall Openings 2a Thermal bridging Thermal bridging 3 Air permeability	g calculated from line	1.22 (max	k. 2.00) transmitt	tances for each j	·	_	
Party wall Openings <u>2a Thermal bridging</u> Thermal bridging	g calculated from line	1.22 (max	k. 2.00) transmitt		·	30)] m³/(h.m²) @ 50 Pa] m³/(h.m²) @ 50 Pa	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r16

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Boiler system with radiators or underfloor - Mains gas Data from database Ideal LOGIC COMBI ESP1 35 Combi boiler Efficiency: 89.6% SEDBUK2009 Minimum: 88.0%	Pass
Secondary heating system	None	
5 Cylinder insulation		
Hot water storage	No cylinder	
6 Controls		
Space heating controls	Time and temperature zone control	Pass
Hot water controls	No cylinder	F d33
Boiler interlock	Yes	Pass
	103	F ass
<u>7 Low energy lights</u> Percentage of fixed lights with low-energy fittings	100 %	
Minimum	75 %	Pass
8 Mechanical ventilation		
Not applicable		
riterion 3 – Limiting the effects of heat gains in su	mmer	
Summertime temperature		
Overheating risk (South West England)	Not significant	Pass
ased on:	inot significant	Fass
Overshading	Average	
Windows facing North West	4.49 m ² , No overhang	
Air change rate	4.00 ach	
Blinds/curtains	None	
riterion 4 – Building performance consistent with		
Party Walls		
Туре	U-value	
Filled Cavity with Edge Sealing	0.00 W/m²K	Pass
Air permeability and pressure testing		
3 Air permeability		
Air permeability at 50 pascals	5.00 (design value) m ³ /(h.m ²) @ 50 Pa	9
Maximum	10.0 m ³ /(h.m ²) @ 50 Pa	
<u>D Key features</u>		
Party wall U-value	0.00 W/m²K	
Door U-value	0.83 W/m ² K	


This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r16

RECOMMENDATIONS



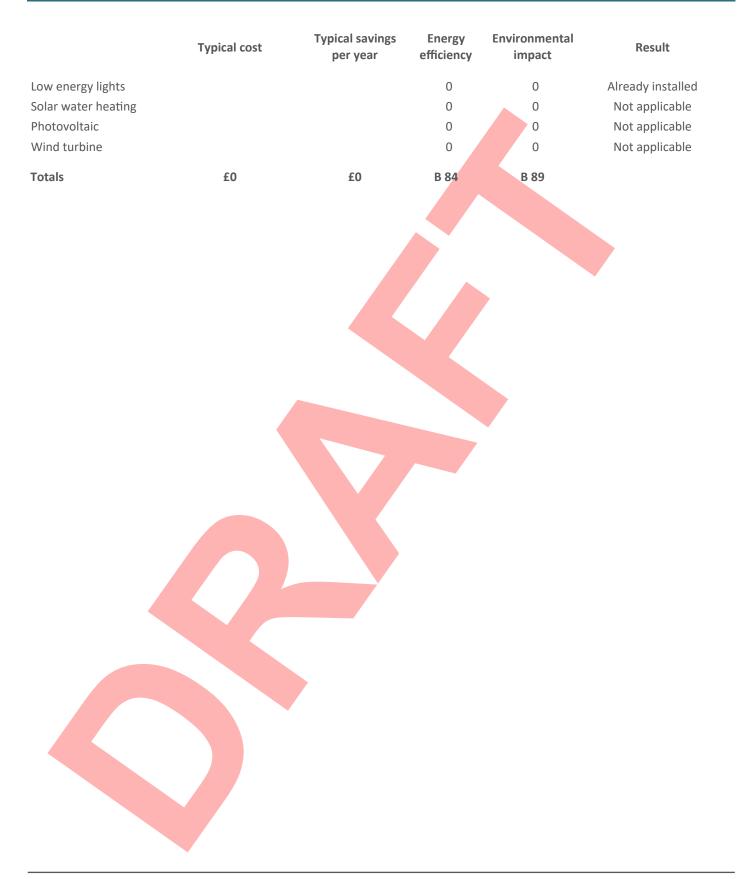

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

