

Expanded Material Terminology

LWD (Long Way of the Diamond)


Measured from the center of the joint to the center of the adjacent joint. This dimension is fixed, and is always parallel to the width of the coil and corresponds with the diamond dimension.

SWD (Short Way of the Diamond)

Is the length of the short axis way of the diamond, measured from the center of the joint to the center of the joint. For each fixed LWD dimension, there is a range of SWD dimensions available.


Strand Width (Reference):

The strand width is the amount of metal slit from the parent metal in forming the mesh. This is closely controlled and is directly related to the weight, overall thickness and open area as shown in the above illustration.

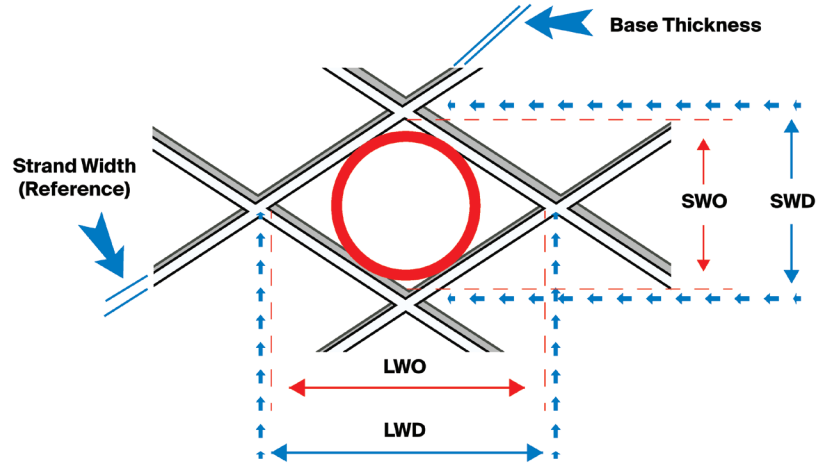

Expanded Material:

Is simultaneously slit and stretched by shaped tools which determine the form and number of openings. Strand dimensions (width and thickness), overall thickness of the piece and weight per square inch are controlled variables specified by the requirements needed for your application.

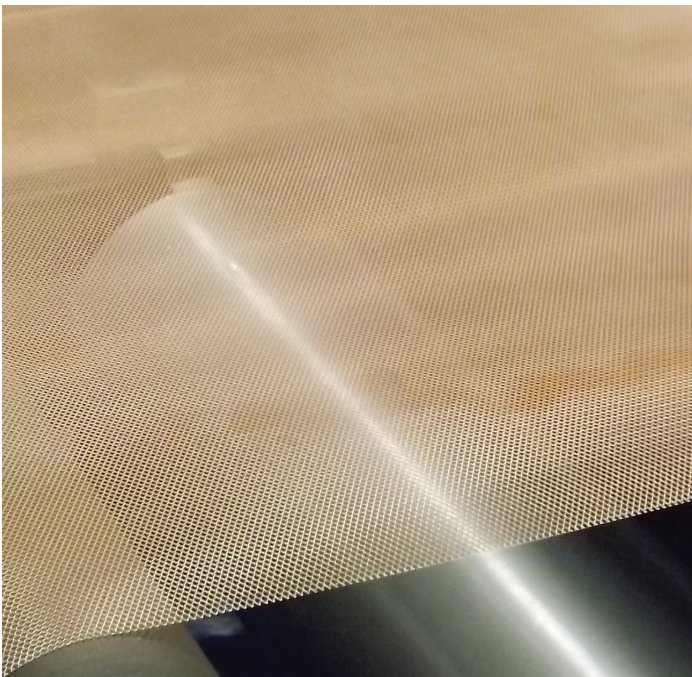

Common List of Ductile Raw Materials*

Typical Metals	Plastics / Films
Aluminum, Copper, Nickel	ECTFE, ETFE
Stainless Steel, Silver, Titanium	FEP
Zirconium, Niobium, Kanthal	PEEK, PFA
Low Carbon Steel, Zinc, Brass	PTFE
Gold, Inconel, Phosphor Bronze	Other Fluoropolymers
Custom Alloys	*Most common listed

Explanation of Product Code

Example : 3 Ni 5-077

First number represents original material thickness	3 = .003" (.076 mm)
Letters are chemical symbol for material	Ni = Nickel
Number immediately following letters represents strand width	5 = .005" (.127 mm)
Last number indicates the long way of the diamond	077 = .077" (1.96 mm)

Expanded Material Terminology

Engineered Materials (Dexmet Corporation)

Engineered Materials (Dexmet Corporation) manufactures precision expanded metal foils and polymers with exacting mechanical and electrical properties to meet very tight conductivity, weight, heat and dimensional tolerances.

Typical applications include but are not limited to, advanced batteries, fuel cells, hydrogen and oxygen generation, EMI/RFI shielding, lightning strike protection, automotive, wind power, filtration, separation and general industrial applications.

Tool Code	LWD (in)	SWD (in)		Hole Size (in)		Opening/SQIN		Open Area		Width (in)	Raw Thickness (in)	
		Min	Max	Min	Max	Min	Max	Min	Max		Min	Max
025	0.025	0.0125	0.0154	0.0012	0.008	5200	6400	32%	75%	8	0.001	0.003
031	0.031	0.0182	0.0244	0.0015	0.01	2650	3550	32%	82%	12	0.001	0.005
040	0.040	0.0222	0.0323	0.002	0.017	1750	2250	24%	85%	12	0.0015	0.06
050	0.050	0.0244	0.0357	0.003	0.022	1120	1640	21%	89%	24	0.0015	0.008
060	0.060	0.0303	0.0435	0.003	0.027	780	1150	20%	90%	24	0.0015	0.009
075	0.075	0.0303	0.0370	0.0033	0.03	720	880	15%	90%	38	0.0015	0.009
077	0.077	0.0333	0.0556	0.004	0.033	475	775	15%	90%	36	0.002	0.012
080	0.080	0.0370	0.0667	0.007	0.04	375	675	16%	90%	48	0.002	0.014
090	0.090	0.0455	0.0556	0.007	0.045	400	500	16%	90%	24	0.002	0.014
100	0.100	0.0400	0.0769	0.007	0.046	250	475	16%	90%	38	0.002	0.017
105	0.105	0.0500	0.0769	0.007	0.048	250	350	20%	90%	24	0.002	0.018
125	0.125	0.0500	0.1111	0.008	0.052	150	325	20%	90%	48	0.002	0.025
140	0.140	0.0588	0.1250	0.01	0.065	110	250	30%	90%	24	0.003	0.03
158	0.158	0.0769	0.1250	0.011	0.075	100	180	30%	90%	27	0.003	0.03
180	0.180	0.0714	0.1111	0.011	0.08	100	150	32%	90%	24	0.004	0.03
190	0.190	0.0667	0.1000	0.02	0.088	80	130	35%	90%	24	0.005	0.03
215	0.215	0.0833	0.1429	0.02	0.095	65	110	35%	90%	24	0.005	0.03
236	0.236	0.0909	0.1429	0.025	0.1	60	90	35%	90%	24	0.005	0.03
250	0.250	0.1000	0.1667	0.027	0.11	50	80	35%	90%	24	0.005	0.03
284	0.284	0.0909	0.1429	0.03	0.13	45	80	35%	90%	24	0.005	0.03
400	0.400	0.1250	0.3333	0.035	0.18	15	40	35%	90%	24	0.005	0.03
500	0.500	0.2000	0.400	0.05	0.225	10	20	35%	90%	36	0.005	0.03

All recommendations, statements, and technical data contained herein are based on tests we believe to be reliable and correct, but accuracy and completeness of said tests are not guaranteed and are not to be construed as a warranty, either expressed or implied. User shall rely on his own information and tests to determine suitability of the product for the intended use and assumes all risks and liability resulting from his use of the product. Seller's and manufacturer's sole responsibility shall be to replace that portion of the product of this manufacturer which proves to be defective. Neither seller nor manufacturer shall be liable to the buyer or any third person for any injury, loss, or damage directly or indirectly resulting from use of, or inability to use, the product. Recommendations or statements other than those contained in a written agreement signed by an officer of the manufacturer shall not be binding upon the manufacturer or seller.

Printed in the U.S.A

Engineered Materials
22 Barnes Industrial Park Road
Wallingford, CT 06492, USA
Telephone: (203) 294-4440
Website: www.dexmet.com
Issue Date: 5/10/2020
Supersedes: 8/10/2019
Lit: expandedmetalterm