


INTERPHONE INSTRUCTIONS

A full set contains 2 x V6 (EJEAS 6Rider) Interphones (pictured below), 2 x air tube earpieces with OMTP-CTIA adapters (or 2 x boom mic/earpieces) and 2 x USB charging cables.

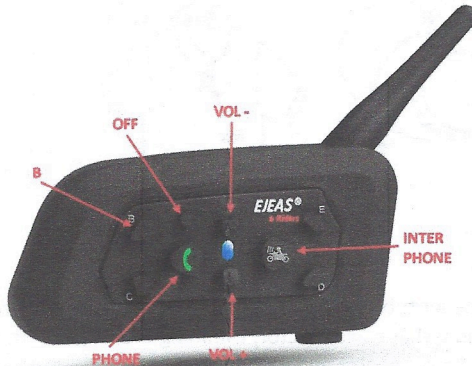

To turn on and connect two (V6 6Rider) Interphones:

Start with both V6 units turned off. (Press the RESET button to turn off)

On both units simultaneously, press and hold the INTERPHONE button until the LED flashes red and blue continuously. Release the INTERPHONE buttons when you see both units flashing red and blue.

On the first unit, press the INTERPHONE button. The LED will flash blue as it seeks to pair with the other. Wait for 5-10 seconds, after which time the LED on the other unit should also start to flash blue.

If the radios don't pair then reset the connections on both radios – turn the radio on by pressing the INTERPHONE button. Then press and hold the PHONE button and B button – the LED will flash red three times and then blue. Connections are reset.

Adjust the volume (+/-) as necessary

When finished, turn off the units by pressing the RESET/OFF button


To connect with EJEAS V6Pro Interphones

Start with both Interphones turned off.

With the V6 6Rider interphone, press and hold the INTERPHONE button until the LED flashes red/blue and then release. On the V6Pro interphone, press and hold the INTERPHONE button until the LED flashes red/blue. Then (on the V6Pro Interphone) press and release the INTERPHONE button – the LED will flash blue as it pairs with the 6Rider interphone. When both units flash blue, the connection has been established.

Earpieces

The acoustic air tube earpiece (L) **must** be connected to the interphone with the supplied OMTP-CTIA adapter (either cable or L-shaped metal adapter).

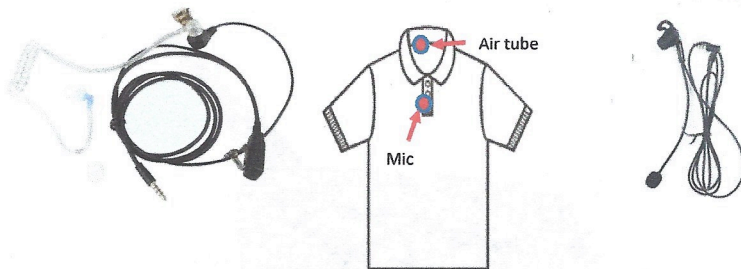

The length of the air tube can be adjusted to best fit your own ear size by removing the earpiece and L-shaped connector, trimming the length with sharp scissors and then replacing the connector and earpiece.

If you use the boom microphone (R), you do not need to use the adapter cable to connect to the radio. The earpiece can be rotated through 180 degrees to fit in either ear. If you find the cable too short, 0.5m extension cables are available to purchase.

Charging the Interphone

A full charge should last approximately 6-7 hours. Charge using the supplied USB – 3.5mm cable, plugging into a PC USB socket, car or wall charger.

Charging should take approximately 1-2 hours, during which time the LED will show red. When charged, the LED goes out.

Do not leave the interphones for long periods of time (> 6 weeks) between use and charge as this can damage the rechargeable battery.