PREDICTED ENERGY ASSESSMENT




Eastergate, Dwelling type: House, End-Terrace

Hampshire Homes Date of assessment: 24/06/2021
Produced by: William Vincent
Total floor area: 104.14 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

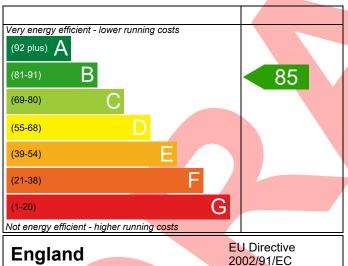

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

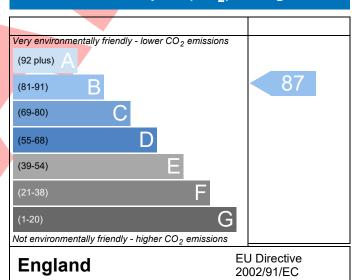

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



| Property Reference Plot 021 3BC End-T | | | | Issued on Date | 24/06/2021 | | |
|---|---------------------|---|---------------|---|------------|--|--|
| Assessment 001 | | | | | | | |
| Reference | | | | | | | |
| Property Eastergate, Hampshi | re Homes | | | | | | |
| SAP Rating | 85 B | DER | 15.81 | TER | 16.66 | | |
| Environmental | 87 B | % DER <ter< td=""><td></td><td>5.08</td><td></td></ter<> | | 5.08 | | | |
| CO ₂ Emissions (t/year) | 1.37 | DFEE | 44.92 | TFEE | 49.68 | | |
| General Requirements Compliance | Pass | % DFEE <tfee< td=""><td></td><td>9.58</td><td></td></tfee<> | | 9.58 | | | |
| Assessor Details Mr. William Vincent, Wil | | 1582544250, | | Assessor ID | T759-0001 | | |
| William.Vincent@ee-ltd. | co.uk | | | | | | |
| Client | | | | | | | |
| SUMARY FOR INPUT DATA FOR New Build (A | s Designed) | | | | | | |
| Criterion 1 – Achieving the TER and TFEE rate | | | | | | | |
| 1a TER and DER | | | | | | | |
| Fuel for main heating | Mains ga | s | | | | | |
| Fuel factor | 1.00 (ma | ins gas) | | | | | |
| Target Carbon Dioxide Emission Rate (TER) | 16.66 | | | kgCO ₂ /m ² | | | |
| Dwelling Carbon Dioxide Emission Rate (DB | ER) 15.81 | | | kgCO ₂ /m ² | Pass | | |
| | -0.85 (-5. | 1%) | | kgCO₂/m² | | | |
| 1b TFEE and DFEE | | | | | | | |
| Target Fabric Energy Efficiency (TFEE) | 49.68 | | • | kWh/m²/yr | | | |
| Dwelling Fabric Energy Efficiency (DFEE) | 44.92 | 7 | | kWh/m²/yr | | | |
| | -4.8 (-9.7 | (%) | | kWh/m²/yr | Pass | | |
| Criterion 2 – Limits on design flexibility | | , | | | | | |
| Limiting Fabric Standards | <u> </u> | | | | | | |
| 2 Fabric U-values | | | | | | | |
| Element | Average | Hi | ighest | | | | |
| External wall | 0.22 (max. 0.30) | 0. | 22 (max. 0.70 | 0) | Pass | | |
| Party wall | 0.00 (max. 0.20) | - | | | Pass | | |
| Floor | 0.14 (max. 0.25) | 0. | 14 (max. 0.70 | 0) | Pass | | |
| Roof | 0.11 (max. 0.20) | 0. | 11 (max. 0.35 | 5) | Pass | | |
| Openings | 1.48 (max. 2.00) | 1. | 50 (max. 3.30 | 0) | Pass | | |
| 2a Thermal bridging | | | | | | | |
| Thermal bridging calculated from linear | r thermal transmitt | ances for each jur | nction | | | | |
| 3 Air permeability | | | | | | | |
| Air permeability at 50 pascals | 5.00 (des | sign value) | | Э | | | |
| Maximum | 10.0 | | | m ³ /(h.m ²) @ 50 Pa | Pass | | |
| Limiting System Efficiencies | | | | | | | |
| 4 Heating efficiency | | | | | | | |

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r16

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



| Main heating system | Boiler system with radiators or underfloor - Mains gas Data from database Ideal LOGIC COMBI ESP1 35 Combi boiler Efficiency: 89.6% SEDBUK2009 Minimum: 88.0% | | | |
|---|--|------|--|--|
| Secondary heating system | None | | | |
| 5 Cylinder insulation | | | | |
| Hot water storage | No cylinder | | | |
| 6 Controls | | _ | | |
| Space heating controls | Time and temperature zone control | Pass | | |
| Hot water controls | No cylinder | | | |
| Boiler interlock | Yes | Pass | | |
| 7 Low energy lights | | | | |
| Percentage of fixed lights with low-energy fittings | 100 % | | | |
| Minimum | 75 % | Pass | | |
| 8 Mechanical ventilation | | | | |
| Not applicable | | | | |
| Criterion 3 – Limiting the effects of heat gains in sur | nmer | | | |
| 9 Summertime temperature | | | | |
| Overheating risk (Thames Valley) | Slight | Pass | | |
| Based on: | | | | |
| Overshading | Average | | | |
| Windows facing North East | 4.43 m², No overhang | | | |
| Windows facing South East | 2.46 m², No overhang | | | |
| Windows facing South West | 9.12 m², No overhang | | | |
| Air change rate | 4.00 ach | | | |
| Blinds/curtains Dark-coloured curtain or roller blind, closed 100% of daylig | | | | |
| Criterion 4 – Building performance consistent with | | | | |
| Party Walls | | | | |
| Туре | U-value | | | |
| Filled Cavity with Edge Sealing | 0.00 W/m²K | Pass | | |
| Air permeability and pressure testing | | | | |
| 3 Air permeability | | | | |
| Air permeability at 50 pascals | 5.00 (design value) m ³ /(h.m ²) @ 50 Pa | | | |
| Maximum | 10.0 m ³ /(h.m ²) @ 50 Pa | Pass | | |
| 10 Key features | | | | |
| Party wall U-value | 0.00 W/m²K | | | |
| Roof U-value | 0.11 W/m²K | | | |
| | | | | |

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.




Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r16

RECOMMENDATIONS



| | Typical cost | Typical savings per year | Energy efficiency | Environmental impact | Result |
|---------------------|------------------|-----------------------------|----------------------|-------------------------|-------------------|
| Low energy lights | | | 0 | 0 | Already installed |
| Solar water heating | £4,000 - £6,000 | £31 | B 86 | B 88 | Recommended |
| Photovoltaic | £3,500 - £5,500 | £341 | A 95 | A 96 | Recommended |
| Wind turbine | | | 0 | 0 | Not applicable |
| Totals | £7,500 - £11,500 | £372 | A 95 | A 96 | |

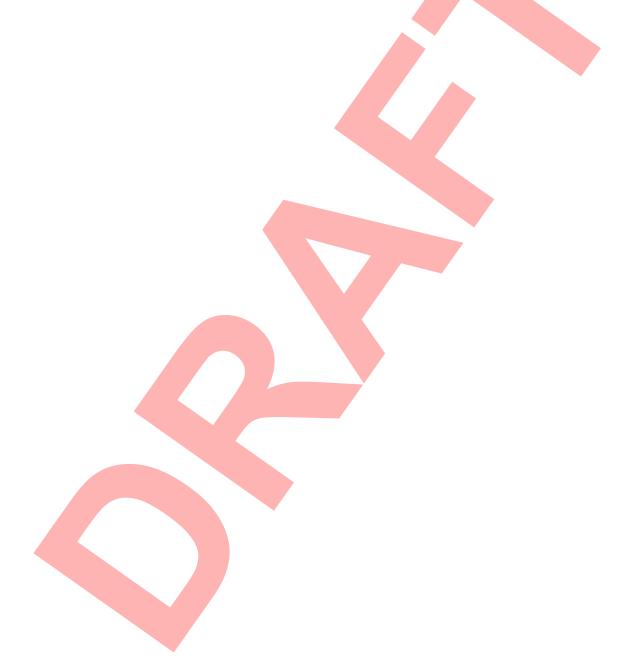

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

